



MODEL OVERVIEW

# A5000

Platform Lift

## **A5000 Platform Lift**

The New A5000 Platform Lift provides a space saving and smart access solution for all building types. The A5000 platform lift requires NONE of the items below:

| Shaft |  
| Machine room |  
| Pit |  
| Lifting Beam |

This makes the A5000 lift one of the most cost effective lifts to install. These advantages, combined with an affordable price, 5 year Motor and Drive-Nut Warranty, fast delivery, installation and low operating costs, make the A5000 an excellent choice. The A5000 complies with EC safety standards and regulations.

## **Clean, functional and ergonomic**

The flexibility of the A5000 makes it an ideal lift in both new and existing buildings. This lift is an excellent solution for department stores, hotels, restaurants, schools, office buildings, healthcare facilities, apartment buildings, and private homes.

The A5000 offers the choice between seven different platforms sizes and several door models and gates, including elegant, super light aluminium doors, fully glazed fire rated EI60G doors. Choose from an extensive range of RAL colours along with stainless steel.



# CONTENTS

**4**

---

Platform Lift Sizes

**6**

---

A5000 Key Features

**8**

---

Overview

**10**

---

A5000 Outdoor Lift

**12**

---

Colours / Flooring

**14**

---

Technical Information





# Platform Lift Sizes



**A4000 Homelift**  
Small size platform lift - low back

Rated load	300 kg
Platform sizes (w x d)mm	800 x 830 1000 x 830 1000 x 930 1100 x 930



**A5000**  
Platform lift - low back

Rated load	400-500 kg
Platform sizes (w x d)mm	800 x 1250 900 x 1500 1000 x 1300 1100 x 1400 1000 x 1500 1100 x 1500 1100 x 1600



**A5000 H**  
Platform lift with high back

Rated load	400-500 kg
Platform sizes (w x d)mm	900 x 1500 1000 x 1500 1100 x 1500







Image shown is a A4000 lift

# A5000 Key Features

AUTOMATIC ENERGY  
SAVING SHAFT LIGHTING.

SOLID ONE PIECE GUIDE  
WALL UNLIKE MOST THAT  
HAVE 3 PANELS. 100% SAFE  
FROM FINGER TRAPS.

POWERED DOOR  
OPENERS OPTIONAL.

STAINLESS  
STEEL DOORS  
AVAILABLE.

SHAFT  
CONSTRUCTED  
FROM STEEL  
PANELS WITH  
ANODISED  
ALUMINIUM  
PROFILES.

SOLID 1 PIECE  
GUIDE WALL  
MADE UP  
OF 904mm  
STEEL PANELS.



ALUMINIUM PROFILE MATCHING  
HANDRAIL AND DOOR HANDLES.

PLATFORM SAFETY BAR FITTED TO  
ALL 4 SIDES OF THE PLATFORM.



The A5000 has been designed to provide a low-cost quality solution for easy access in the majority of environments; private, public and commercial.

The A5000 Platform Lift is the best solution for increased accessibility in existing buildings.

### The perfect accessibility solution

The A5000 is designed on a self-lubricating screw and nut drive system, with a self-contained motor cleverly concealed and out of sight, removing the need for a separate machine room.

The A5000 has been specially designed to adapt to special space restrictions, while maintaining user's security and comfort.

The A5000 has been thoughtfully engineered to comply with the highest quality standards.

The A5000 is tested, certified and conforms to the relevant compulsory safety requirements of the European Machinery of Directive 2006/42/EC.


### Easy installation and maintenance

The A5000 lift is easy to install not requiring a separate machine room or the need to build a shaft enclosure to contain the lift.

In addition to low installation costs, the eco friendly A5000 is A rated for energy consumption offering low operational and maintenance costs.

### Largest selection of doors and door options

- Wide choice of door types; steel doors, stainless steel doors, aluminium doors, gates and fire rated doors
- Concealed door closers now standard across the range.
- Concealed automatic door openers optional
- Adaptable to your preferences, great choice of finishes and dimensions

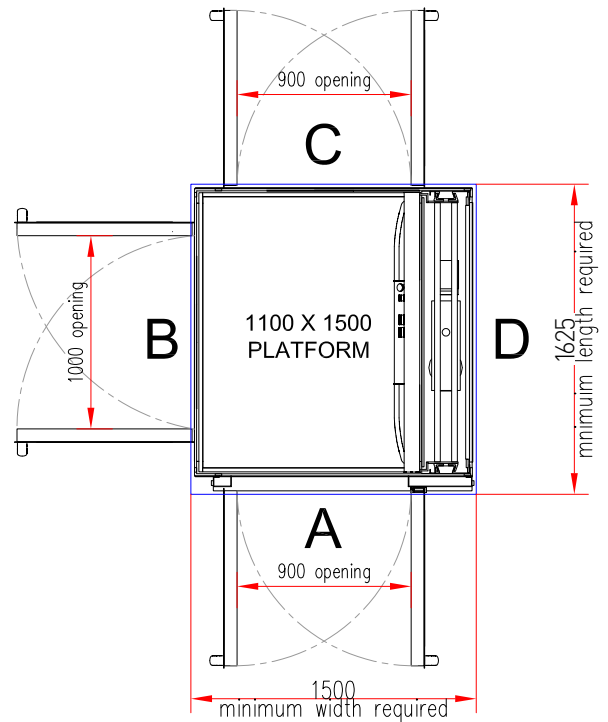

### A5000 - Standard size, mm

Platform size (w x d): 1100mm x 1500mm

Cut out size (w x d): 1500mm x 1630mm

Other sizes available on request.



# Lift products that distinguish themselves

- > Quickest installation time on the market, Standard 2 stop within 2 days.
- > All A5000 lifts are weight tested on-site as part of our lift commissioning procedure.
- > Cost effective installation for existing buildings
- > Comes complete within its own shaft with optional glazing available.
- > No concrete shaft, no machine room, no pit, no lifting beam necessary
- > Delivered in small packages for easy access into all building types from listed buildings to top floor Penthouses.
- > 50mm Pit or supplied ramp.
- > Standard rated load 400kg, 5 people Optional 500Kg , 1000Kg Load Available across the A8000 range.
- > Travel height up to 20 metres, 6 landings
- > Easy maintenance with 4 care plans available.
- > Soft start /soft stop
- > A certified product that compiles with European quality standards.
- > Eco friendly "A" rated power consumption contributing to low operating costs.

\*Subject to terms







A5000 LIFT



# New

**Silent Drive Technology**  
with **Cicon** intelligence.





# A5000 Outdoor

---

**The A5000 Outdoor platform lift is based on the market leading A5000 Platform Lift, with the addition of an external roof and reinforced structure and aluminium doors.**

**The A5000 outdoor platform lift, is a clever yet cost effective way to access numerous levels externally.**

The A5000 Outdoor platform lift is ideal for any commercial and domestic environment and comes completely self-contained including canopies over each

door and a shaft heater keeping moisture at bay.

The A5000 Outdoor model is the number one choice for an external platform lift. With standard aluminium doors and external construction helping to remove the need for any additional structural changes to your building, minimising the need for extensive building work.

Tested and designed for harsh Swedish environments the A5000 is the No1 choice to deal with UK climate.






# Interior COLOURS

The A5000 shaft and doors are supplied as standard in RAL 9016 with optional RAL Colours of your choice available.

List of RAL colours commonly used:











## Floor Samples



## Use your own flooring

If you would like to use your own flooring we can prep our platform to suit a tile of up to 20mm. This means you can match your platform to your existing flooring, or your bespoke flooring choice.

## Most popular







"We were looking for a lift in our showroom. The consultant advised us to go for a complete glass shaft. **Best idea ever!** When our customers are in the lift they have a full view over our showroom."


## Tinted glass




Clear glass – Std



Arctic snow




Light Bronze




Dark Bronze



Polar White



Light Grey





Dark Grey



# Technical information

TECHNICAL INFORMATION	A4000, A5000, A7000
Lift location	Indoors / Outdoors***
Rated load kg	300 - 500 kg
Rated speed (m/sec)	Max 0.15
Travel height	Up to 20 m
Min.headroom at top landing	2250 mm (A5000H: 2350)
Pit depth without ramp	50 mm recess
Maximum number of stops	6
Shaft door and gate door	Single hinged
Shaft door measurement	900x2000 mm
Gate door measurement	900x1100 mm
Driving system	Screw and nut, with safety nut
Control system	LINDUS (Safe Integrity Level)
Standard power supply	Single-phase 50/60 Hz 16 A*
Motor power	2.2 KW
Manufactured in	Sweden



## SHAFT DOOR CONFIGURATION

1. Half height door (gate), single entry 2 landings.
2. Full height doors, adjacent. 2 landings.
3. Full height doors, open through. 3 landings.

DRAWINGS  
FOR DOWN LOADING







**we design**  
your ideas



Offering perfect accesibility solution for all kind of building environments: public, commercial and private.

Models carry the CE mark and go through extensive testing and quality checks before leaving our factory. Our lifts are Certified products that comply with European security and quality standards. The Machinery Directive 2006/EC and the European norm EN 81-41. This product information is general and we reserve the right to modify product design and specifications. Minor deviations in color reproduction can occur.



LIFTINSTITUUT

